Datasheet

Suction cup B10XP Polyurethane 60, M5 male

Article number: 0205168



- Suitable for limited level adjustment with good stability.
- Excellent gripping performance on corrugated and porous or surface leaking objects such as cardboard, textured plastic parts and composite material (raw surface)
- In the two-coloured suction cup the bellows and the sealing lip are of different hardnesses, which makes the suction cup strong and stable for accelerations and speed, at the same time, soft and flexible.
- DURAFLEX® suction cups manufactured in a specially developed material that features the elasticity of rubber and wear resistance of polyurethane.
- The material DURAFLEX® is mark free.

Technical data

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Dry sheet metal, Glass handling
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Glass handling
Material	-	Polyurethane (PU)
Weight, min.	g	0.6
Suction cup model	-	B-XP
Volume	cm³	0.19
Height	mm	22.4
Outer diameter, min.	mm	11
Fitting size	-	M5
Fitting option	-	None
Fitting style	-	Male
Fitting type	-	M-thread
Suction cup model	-	B10XP PU60
Movement, vertical max.	mm	3
Curve radius, min.	mm	6

Performance - Lifting forces

B10XP PU60	Vertical (N)	Parallel (N)
20 -kPa	3.1	1
60 -kPa	4.6	2.5
90 -kPa	5.5	3




Material	
Name	Polyurethane (PU60)
Colour	Green transparent
Temperature, min. °C	10
Temperature max. °C	50
Hardness OShore A	60

Material resistance

n/a
Fair
Fair
Fair
Poor
Excellent
Poor
Fair
Excellent
Excellent

Dimensional drawings

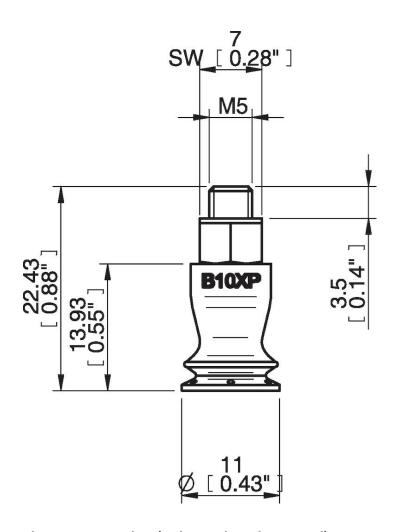

Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] \pm 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg] \pm 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

0204978 | Suction cup B10XP Polyurethane 30/60



Spare parts

3107030 | Fitting M5 male, 10–15 0205169 | Suction cup B10XP Polyurethane 60

